



PERZI



PERZI NEXGEN

M A N U F A C T U R I N G

***Experience, Innovation, Development,***  
**QUALITY**




<i>Manual washers</i>	<u>4</u>
<i>Automatic washers</i>	<u>12</u>
<i>Multi-process washers</i>	<u>16</u>

Manual parts washer.

The washing is carried out manually by applying hot water at low pressure through the washing liquid outlet, either by direct jet or by means of the washing brush.

The operation is carried out by means of the foot control.

The control panel allows selection of the desired wash temperature, as well as starting and stopping the actual heating of the tank and pump.

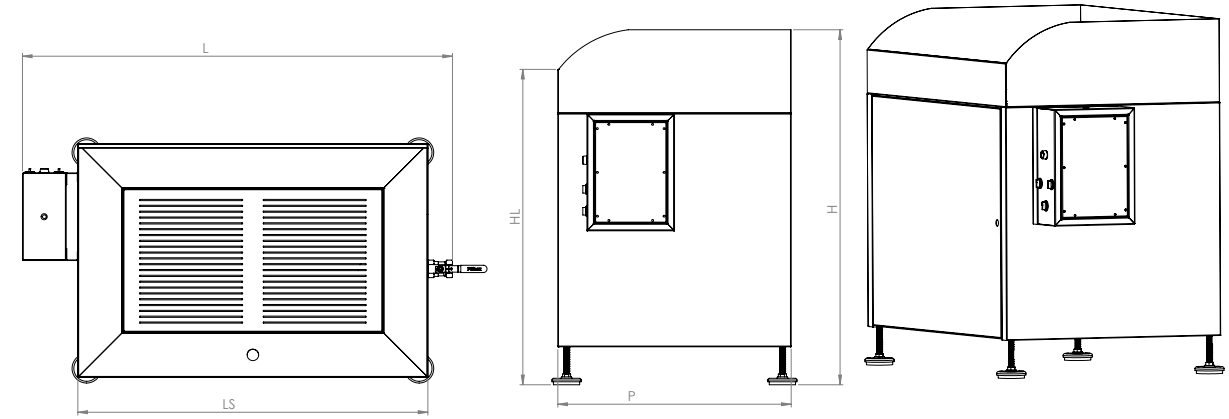

		<b>DELTA 900</b>	<b>DELTA 1200</b>
L	Total width	1.190 mm	1.490 mm
LS	Machine width	900 mm	1.200 mm
H	Height	1.210 mm	1.210 mm
HL	Loading height	1.080 mm	1.080 mm
P	Depth	650 mm	800 mm

### TECHNICAL DATA

	<b>DELTA 900</b>	<b>DELTA 1200</b>
Usefull dimensions	900x600 mm	1.200x600 mm
Tank capacity	70 litres	120 litres
Loading capacity	80 Kg	
Power supply	220V - 1PH - 50 Hz	
Heating power	2,5 Kw	
Wash brush	Included	Included
Blow gun	Incluído	Included
Water outlet	Included	Included
Thermostat	0-60 °C	
Pneumatic supply	6 - 8 bar	
Material	Aisi 430	






# DELTA S

Manual parts washer.

Washing is carried out manually by applying solvent at low pressure through the washing liquid outlet, either by direct jet or by means of the washing brush.

Operation is carried out by means of the foot control.

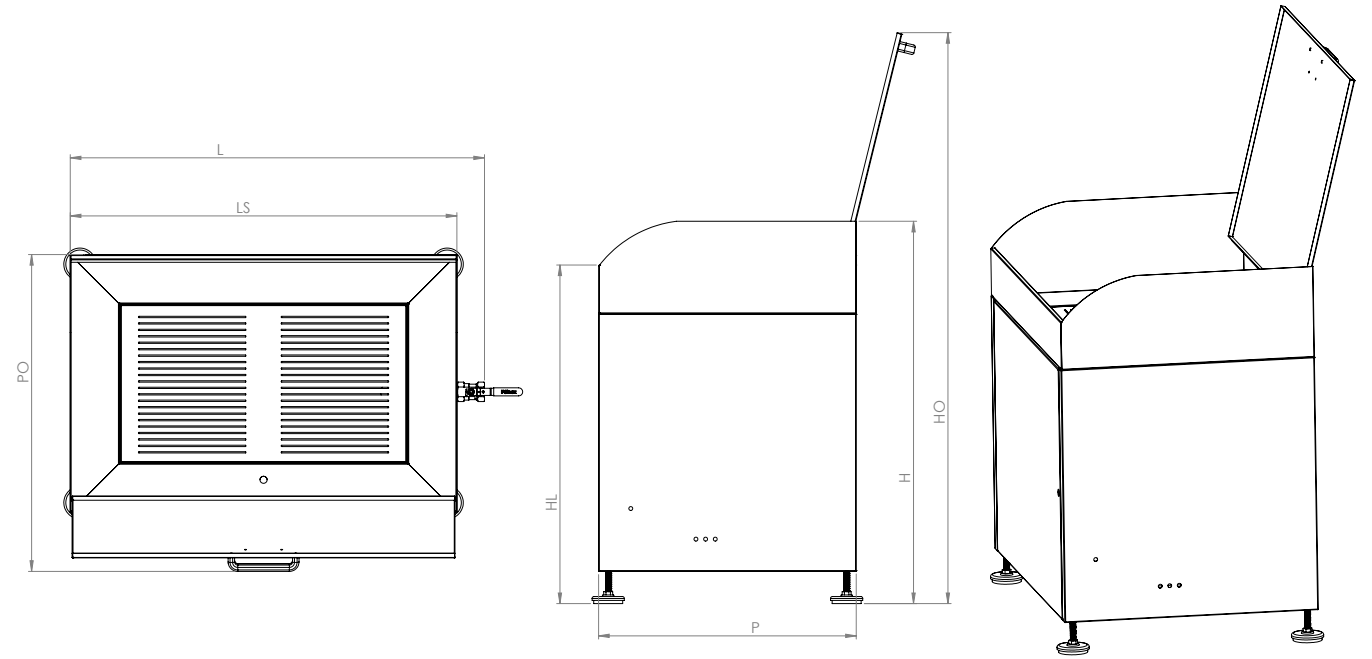

		<b>DELTA 900S</b>	<b>DELTA 1200S</b>
L	Total width	1.190 mm	1.490 mm
LS	Machine width	900 mm	1.200 mm
H	Height	1.210 mm	1.210 mm
HO	Open height	1.770 mm	1.770 mm
HL	Loading height	1.080 mm	1.080 mm
P	Depth	650 mm	800 mm
PO	Open depth	830 mm	980 mm



**TECHNICAL DATA**

	<b>DELTA 900S</b>	<b>DELTA 1200S</b>
Usefull dimensions	900x600 mm	1.200x600 mm
Tank capacity	70 litres	120 litres
Loading capacity	80 Kg	
Power supply	Pneumatics	
Wash brush	Included	Included
Blow gun	Included	Included
Solvent outlet	Included	Included
Pneumatic supply	6 - 8 bar	
Material	Aisi 430	




# METEOR



Manual parts washer with swing door opening.

- Control panel with **touch screen**.
- Washing pressure **up to 150 bar**.
- Washing temperature **up to 60°C**.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.
- Interior led light to illuminate the work area.
- Windscreen wiper to keep the glass clean.

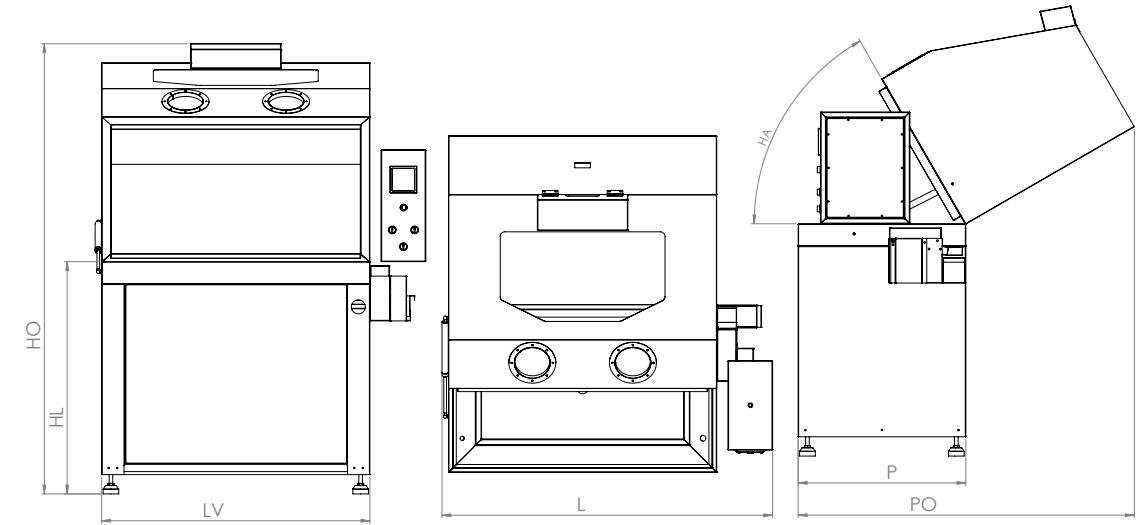

		<b>METEOR 900</b>	<b>METEOR 1100</b>
L	Total width	1.280 mm	1.480 mm
LV	Machine width	1.000 mm	1.200 mm
P	Depth	750 mm	750 mm
PO	Depth of machine open	1.500 mm	1.500 mm
H	Height	1.910 mm	1.910 mm
HO	Open machine height	2.012 mm	2.012 mm
HL	Loading height	1.040 mm	1.040 mm
AC	Washing height	960 mm	960 mm




## TECHNICAL DATA

	<b>METEOR 900</b>	<b>METEOR 1100</b>
Power supply	400V - 3 PH + N + T - 50 Hz	
Loading capacity	100 Kg	100 Kg
Tank capacity	120 litres	165 litres
Heating	2 heaters 3 Kw	
Pressure pump washing	10-150 bar	
Pneumatic supply	6-8 bar	
Thermostat	0-60 °C	
Material	Acero Inox Aisi 430	
Washing capacity	900x650x650 mm	1100x650x650 mm

Manual parts washer with pneumatic opening of the door.

- Control panel with **touch screen**.
- Washing pressure **up to 150 bar**.
- Washing temperature **up to 60°C**.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.
- Interior led light to illuminate the work area.
- Windscreen wiper to keep the glass clean.

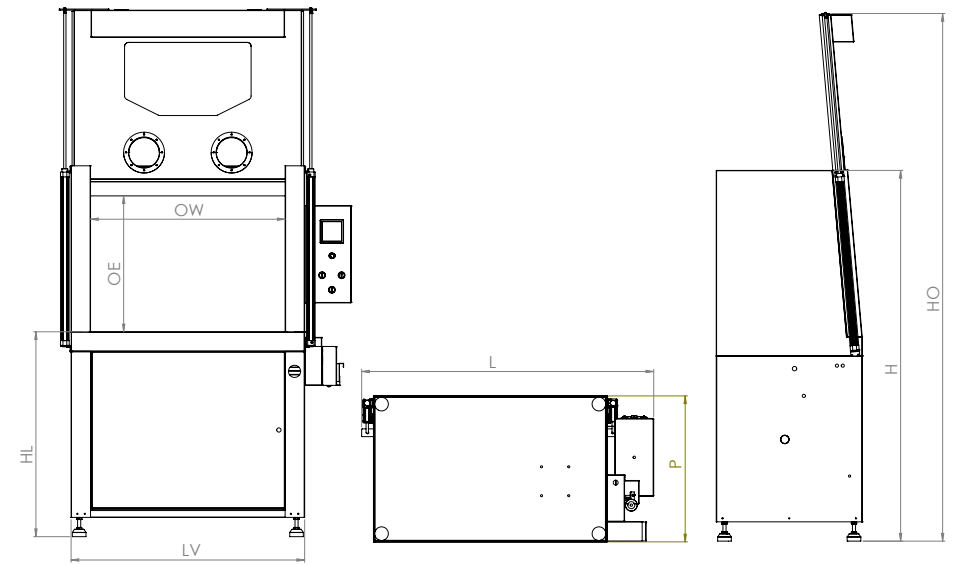

		VIPER 900	VIPER 1100
L	Total width	1.300 mm	1.500 mm
LV	Machine width	1.000 mm	1.200 mm
P	Depth	750 mm	750 mm
H	Height	1.910 mm	1.910 mm
HO	Open machine height	2.710 mm	2.710 mm
HL	Loading height	1.050 mm	1.050 mm
AC	Washing height	960 mm	960 mm
OE	Opening height	700 mm	700 mm
OW	Opening width	800 mm	100 mm

### TECHNICAL DATA


	VIPER 900	VIPER 1100
Power supply	400V - 3 PH + N + T - 50 Hz	
Loading capacity	100 Kg	100 Kg
Tank capacity	120 litres	165 litres
Heating	2 heaters 3 Kw	
Pressure pump washing	10-150 bar	
Pneumatic supply	6-8 bar	
Thermostat	0-60 °C	
Material	Acero Inox Aisi 430	
Washing capacity	990x650x650 mm	1190x650x650 mm



Automatic parts washer.

- Control panel with **touch screen**.
- Washing pressure **up to 3 bar**.
- Washing temperature **up to 60°C**.
- **Double washing circuit** to improve the quality of the wash.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.

The TITAN 1000 and TITAN 1200 models are also equipped with an **electric steam extractor**.

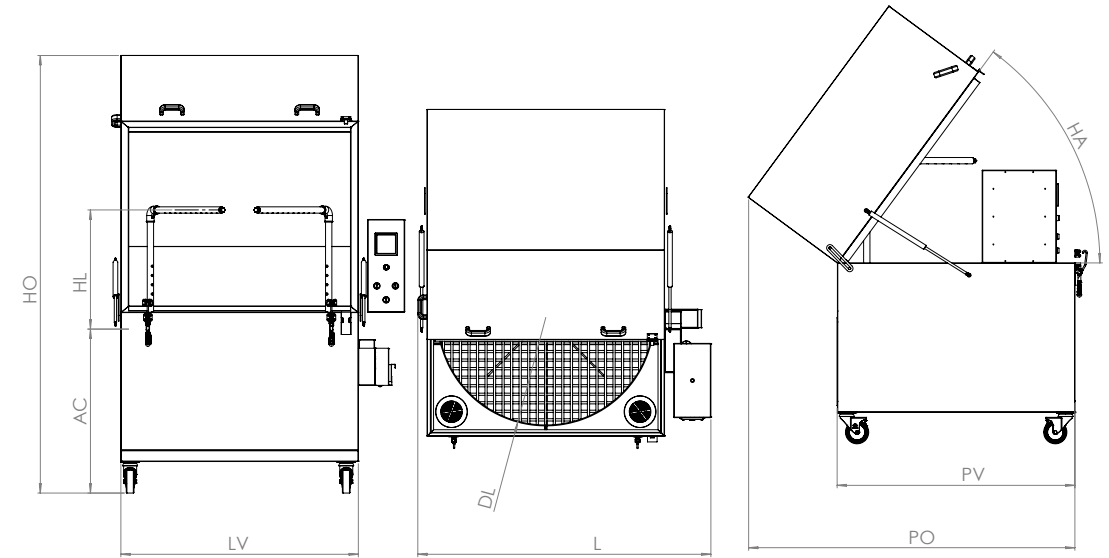

		TITAN 800	TITAN 1000	TITAN 1200
L	Total width	1.180 mm	1.383 mm	1.580 mm
LV	Machine width	880 mm	1.083 mm	1.280 mm
P	Produndity	750 mm	750 mm	1.580 mm
PO	Open machine depth	1.244 mm	1.480 mm	1.760 mm
DL	Washing diameter	720 mm	920 mm	1.120 mm
HO	Open machine height	1.913 mm	2.116 mm	2.350 mm
HL	Washing height	450 mm	500 mm	600 mm
AC	Washing height	847 mm	836 mm	883 mm




### TECHNICAL DATA

	TITAN 800	TITAN 1000	TITAN 1200
Basket diameter	720 mm	920 mm	1.120 mm
Washing height	450 mm	500 mm	600 mm
Loading capacity	150 Kg	250 Kg	350 Kg
Power supply	400V - 3 PH + N + T - 50 Hz		
Steam extractor	-	0,75 Kw	0,75 Kw
Pump pressure	3 bar	3 bar	3 bar
Tank capacity	115 litres	190 litres	270 litres
Heating	2x4.5 Kw	2x 4.5 Kw	2x 7.5 Kw
Thermostat	0-90° C		
Material	Acero Inox Aisi 430		



Automatic parts washer.

- Control panel with **touch screen**.
- Washing pressure **up to 3 bar**.
- Washing temperature **up to 60°C**.
- **Double washing circuit** to improve the quality of the wash.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.
- **Loading trolley** with drip tray and discharge valve.

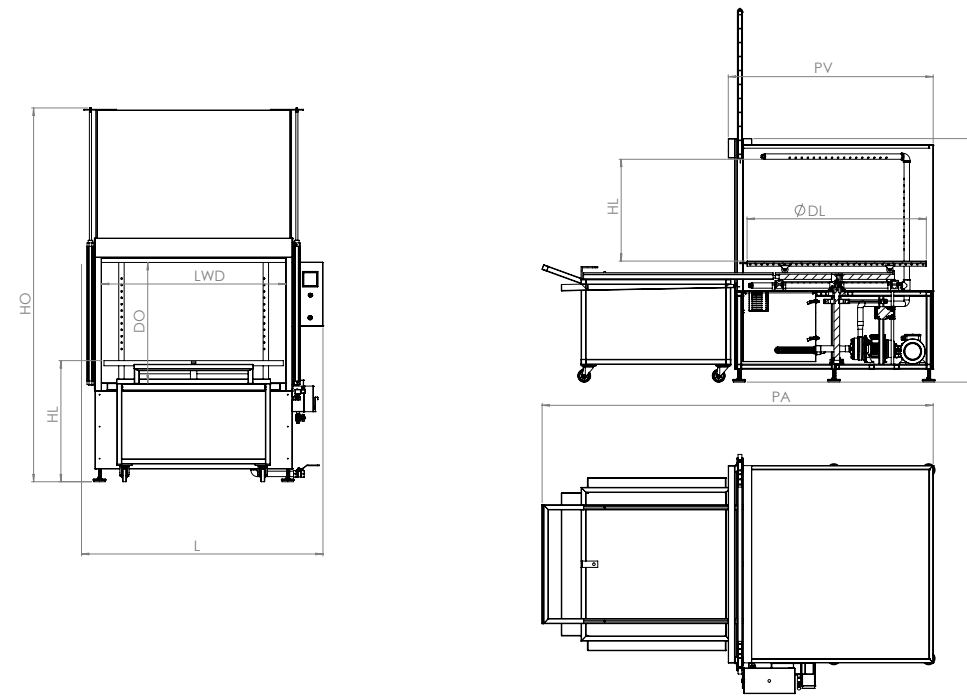

		ATLAS 1400	ATLAS 1600	ATLAS 1800
L	Total width	1.880 mm	2.060 mm	2.270 mm
PV	Machine width	1.600 mm	1.800 mm	2.000 mm
PA	Depth with trolley	3.500 mm	3.460 mm	3.860 mm
HO	Open door height	2.900 mm	3.200 mm	3.200 mm
HC	Closed door height	1.900 mm	1.900 mm	2.050 mm
LWD	Door width	1.400 mm	1.600 mm	1.800 mm
DO	Door height	940 mm	940 mm	1.100 mm
HL	Loading height	750 mm	750 mm	900 mm

AUTOMATIC WASHING MACHINES



### DATOS TÉCNICOS


	ATLAS 1400	ATLAS 1600	ATLAS 1800	ATLAS 2000
Basket diameter	1.320 mm	1.520 mm	1.720 mm	1.920 mm
Washing height	750 mm	750 mm	900 mm	900 mm
Loading capacity	550 Kg	700 Kg	850 Kg	1.000 Kg
Power supply	400V - 3 PH + N + T - 50 Hz			
Steam extractor	0,75 Kw			
Pump pressure	2x 3 bar	2x 3 bar	2x 3 bar	3x 3 bar
Tank capacity	350 litres	470 litres	560 litres	650 litres
Heating	2x 7.5 Kw	2x 7.5 Kw	2x 10 Kw	2x 10 Kw
Thermostat	0-90° C			
Pneumatic supply	6-8 bar			

Material Basket, nozzles and piping in AISI304, body in AISI430

# GOLIAT

Multi-process automatic parts washer with manual washing.

- Control panel with **touch screen**.
- Washing pressure **up to 3 bar**.
- Washing temperature **up to 60°C**.
- **Double washing circuit** to improve the quality of the wash.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.
- **Loading trolley** with drip tray and discharge valve.
- Manual washing with independent rotation control
- Hand wash pump up to **150 bar**.

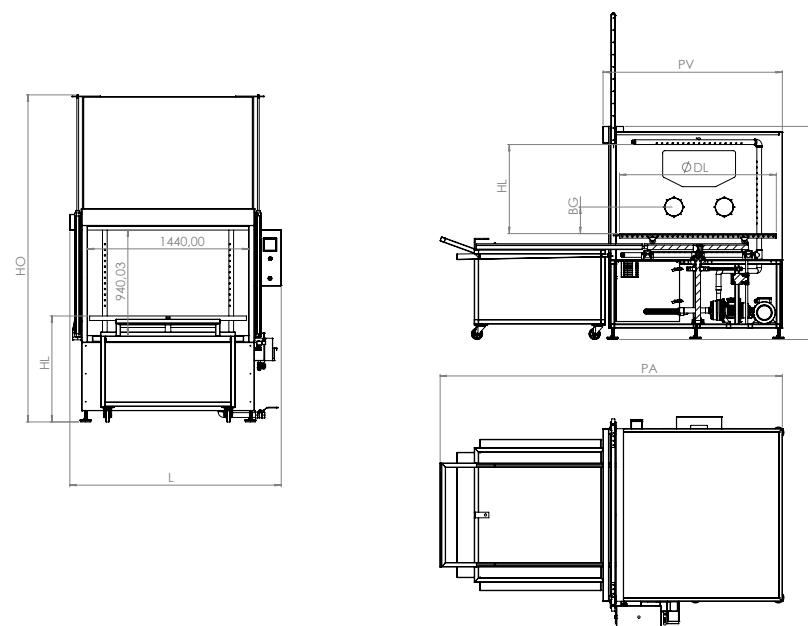


		GOLIAT 1400	GOLIAT 1600	GOLIAT 1800
L	Total width	1.880 mm	2.060 mm	2.270 mm
PV	Machine width	1.600 mm	1.800 mm	2.000 mm
PA	Depth with trolley	3.500 mm	3.460 mm	3.860 mm
HO	Open door height	2.900 mm	3.200 mm	3.200 mm
HC	Closed door height	1.900 mm	1.900 mm	2.050 mm
LWD	Door width	1.400 mm	1.600 mm	1.800 mm
DO	Door height	940 mm	940 mm	1.100 mm
HL	Loading height	750 mm	750 mm	900 mm
BG	Distance between gloves and basket	250 mm	250 mm	250 mm

TECHNICAL DATA				
	GOLIAT 1400	GOLIAT 1600	GOLIAT 1800	GOLIAT 2000
Basket diameter	1.320 mm	1.520 mm	1.720 mm	1.920 mm
Washing height	750 mm	750 mm	900 mm	900 mm
Loading capacity	350 Kg	470 Kg	560 Kg	850 Kg
Power supply	400V - 3 PH+ N + T - 50 Hz			
Steam extractor	0,75 Kw			
Pump pressure	2x 3 bar	2x 3 bar	3x 3 bar	3x 3 bar
Tank capacity	315 litres	430 litres	550 litres	650 litres
Heating	2x 7.5 Kw	2x 7.5 Kw	2x 10 Kw	2x 10 Kw
Thermostat	0-90° C			
Pneumatic supply	6-8 bar			
Pressure manual washing pump	150 bar			
Material	Basket, nozzles and piping in AISI304, body in AISI430			



Multi-process automatic parts washer.

- Control panel with **touch screen**.
- Washing pressure **up to 3 bar**.
- Washing temperature **up to 60°C**.
- **Double washing circuit** to improve the quality of the wash.
- **Oil separator disc**.
- Solenoid valve for **automatic filling** controlled from the touch screen.
- **Loading trolley** with drip tray and discharge valve.

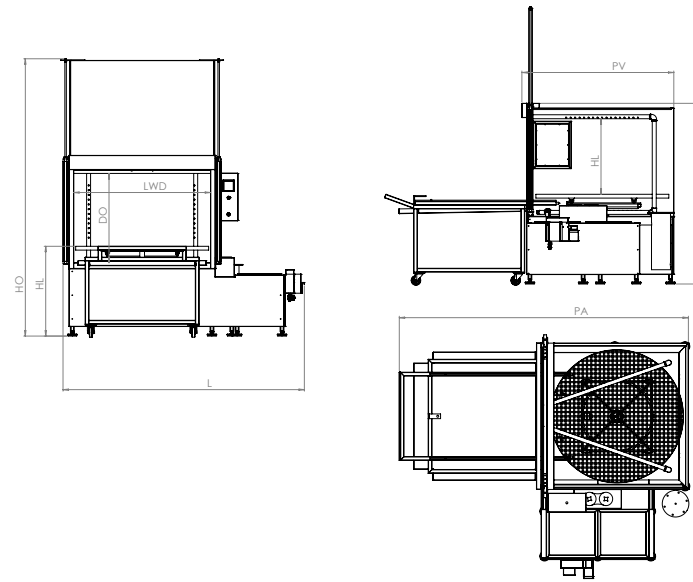




		NOVA 1400	NOVA 1600	NOVA 1800
L	Total width	2.560 mm	2.740 mm	3.420 mm
PV	Machine width	1.600 mm	1.800 mm	2.000 mm
PA	Depth with trolley	3.050 mm	3.250 mm	3.450 mm
HO	Open door height	2.900 mm	2.900 mm	3.200 mm
HC	Closed door height	1.900 mm	1.900 mm	2.050 mm
LWD	Door width	1.400 mm	1.600 mm	1.800 mm
DO	Door height	940 mm	940 mm	1.100 mm
HL	Loading height	750 mm	750 mm	900 mm

## Equipment

Tank selection system

Oil separator disc

Filling solenoid valve

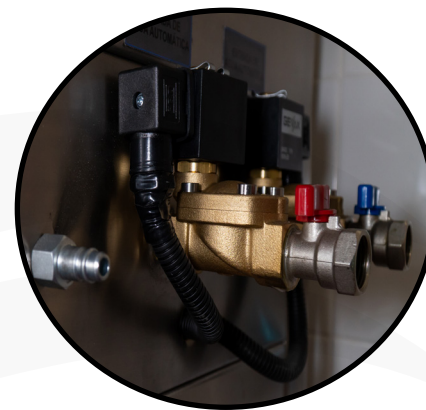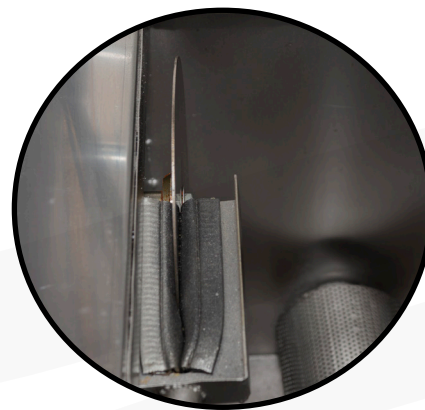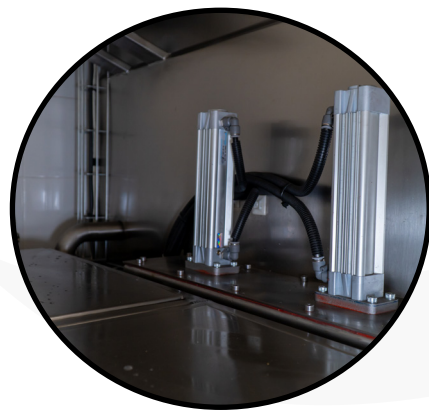

### TECHNICAL DATA

	NOVA 1400	NOVA 1600	NOVA 1800	NOVA 2000
Basket diameter	1.320 mm	1.520 mm	1.720 mm	1.920 mm
Washing height	750 mm	750 mm	900 mm	900 mm
Loading capacity	550 Kg	700 Kg	850 Kg	1.000 Kg
Power supply	400V - 3 PH + N + T - 50 Hz			
Steam extractor	0,75 Kw			
Pump pressure	2x 3 bar	2x 3 bar	3x 3 bar	3x 9 bar
Wash tank capacity	450 litres	500 litres	550 litres	650 litres
Rinsing tank capacity	300 litres	350 litres	400 litres	450 litres
Thermostat	0-90° C			
Pneumatic supply	6-8 bar			
Material	Basket, nozzles and piping in AISI304, body in AISI430			





## PERZI NEXGEN MANUFACTURING

Fevziçakmak Mah. 10776. Sk. B3 Blok B3  
Blok No: 3I,  
42050 Karatay - Konya / TÜRKİYE  
(+90) 552 270 0611 / info@perzinexgen.  
com

VAT No: 7291292002

[www.perzinexgen.com](http://www.perzinexgen.com)  
[info@perzinexgen.com](mailto:info@perzinexgen.com)